

CARBOTROL®

HIGH PRESSURE ACTIVATED CARBON WATER PURIFICATION SYSTEMS




HP-200

FEATURES

- High activity liquid phase carbon
- Corrosion resistant, wound epoxy/fiberglass construction
- Operating pressure to 150 psig
- ABS fittings, polypropylene internal piping
- Standard 1" NPT fittings for ease of installation
- Supplied filled with carbon, ready to use
- Optional: NSF/ANSI 61 Certified Carbon for food grade/potable water applications

SIZES

MODEL	CARBON QUANTITY	FLOW CAPACITY
HP-90	90 lbs.	10 GPM
HP-200	200 lbs	10 GPM

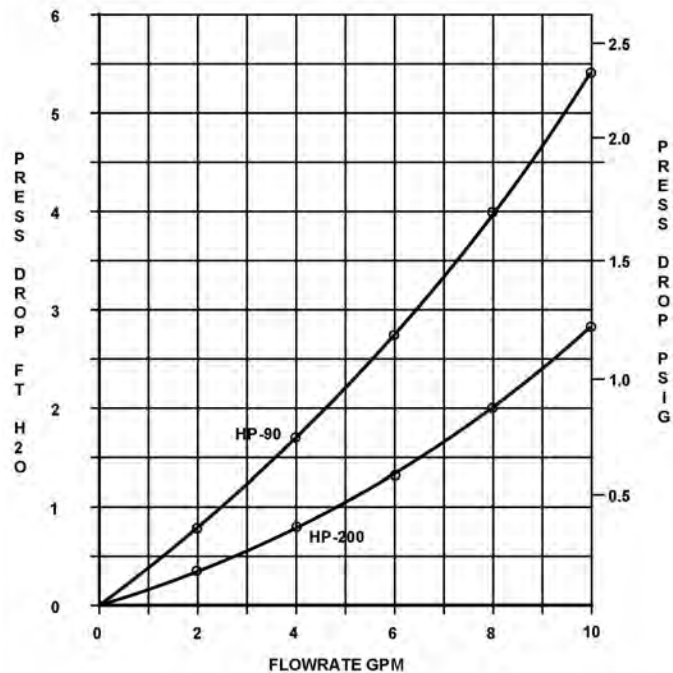

HIGH PRESSURE ACTIVATED CARBON WATER PURIFICATION SYSTEMS

