



# CARBOTROL®

## HIGH PRESSURE ACTIVATED CARBON WATER PURIFICATION SYSTEMS



### SIZES

<u>MODEL</u>	<u>CARBON QUANTITY</u>	<u>FLOW CAPACITY</u>
HP-90	90 lbs.	10 gpm
HP-200	200 lbs.	10 gpm
HP-1000	1000 lbs.	50 gpm
HP-1700	1700 lbs.	100 gpm

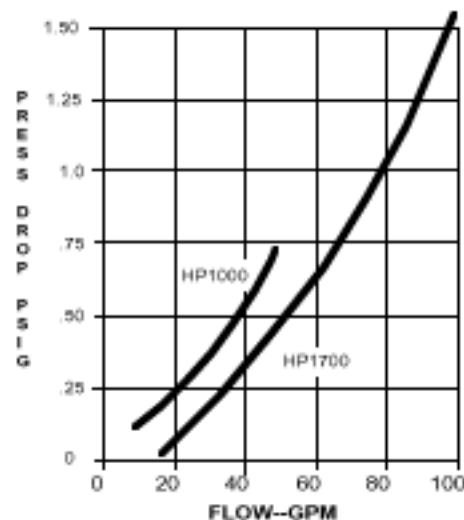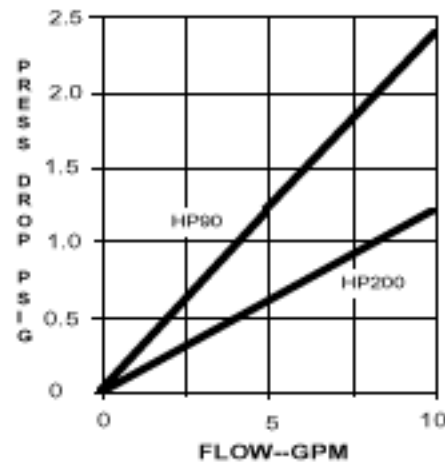

### FEATURES

- High activity liquid phase carbon.
- Operating pressure to 75 psi.
- Corrosion resistant, wound epoxy/fiberglass construction.
- ABS fittings, polypropylene internal piping.
- Standard NPT fittings for easy installation.
- Complete with support stand.

### OPTIONAL:

- NSF certified carbon for potable water applications.

ADV, HP90/200  
10-16-92  
REV 6-16-93

© Copyright 1993 Carbtrol Corporation - 10/4/02


AT-0004

**CARBOTROL®**  
CORPORATION

955 Connecticut Ave., Suite 5202  
Bridgeport, CT 06607

800-242-1150 Fax: 203-337-4347  
[www.carbtrol.com](http://www.carbtrol.com) [info@carbtrol.com](mailto:info@carbtrol.com)

## HIGH PRESSURE ACTIVATED CARBON WATER PURIFICATION SYSTEMS

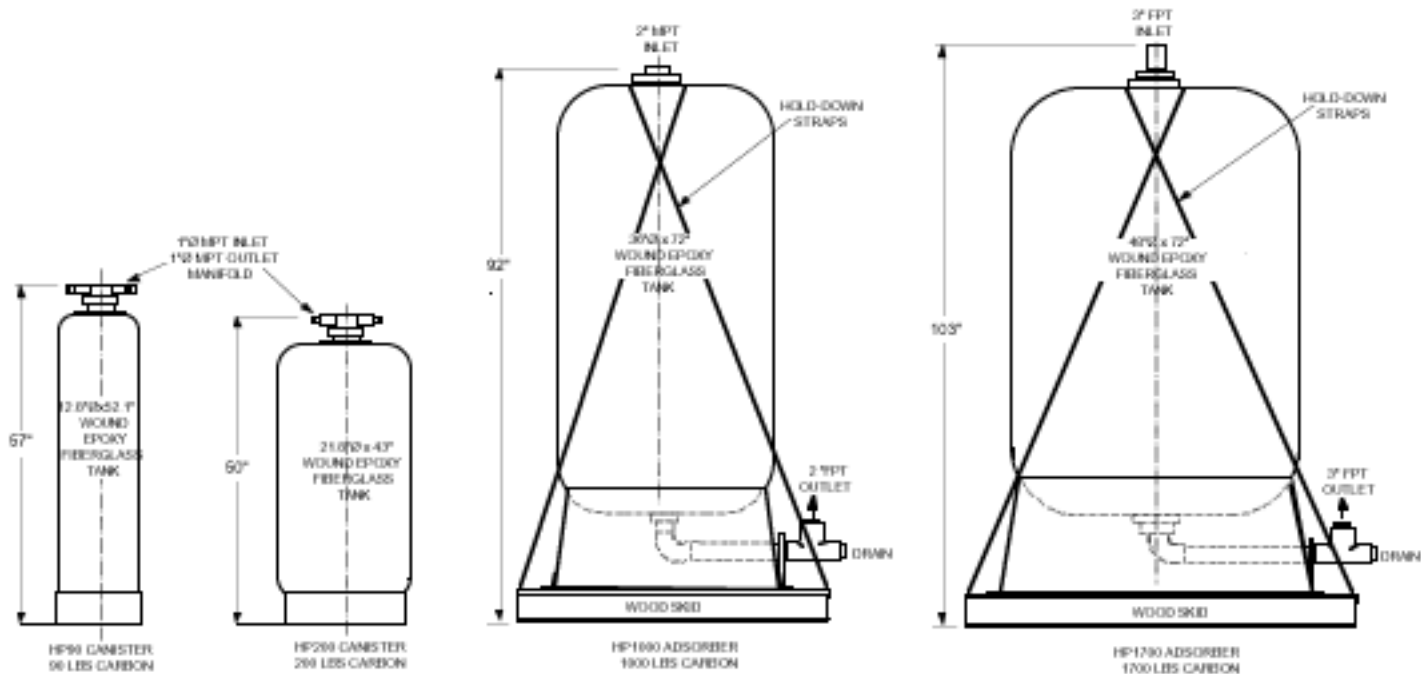

Note: Dimensions given above are approximate.

### SPECIFICATIONS

MODEL	APPROX. DIAMETER/ HEIGHT	FILL/ CLEANOUT PORT	CARBON WEIGHT	INLET/ OUTLET	SHIPPING WEIGHT
HP-90	13" / 57"	4 1/2"	90 lbs.	1" MPT	135 lbs.
HP-200	22" / 50"	4 1/2"	200 lbs.	1" MPT	250 lbs.
HP-1000	36" / 92"	6"	1000 lbs.	2" MPT / 2" FPT	1500 lbs.
HP-1700	48" / 103"	6"	1700 lbs.	3" FPT	2400 lbs.